

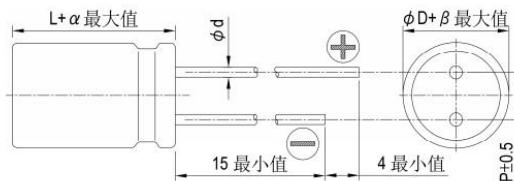
105°C 10000hours assured

■ 105°C 10000小时寿命保证

- Low ESR and High ripple current
低等效串联电阻(ESR)并可承受高纹波电流
- RoHS compliance 符合RoHS指令


Specifications 特性表

| Items 项目 | Characteristics 主要特性 | | | | | | | | | | | | | | | | | | | | | |
|---|---|----------------------------|--|-----------|---|------------|---|---------------------|-------------------------------|------------------|-----|-----|-----|-----|-----|--|------------------|-----|-----|-----|-----|-----|
| Operation Temperature Range 使用温度范围 | -55°C~105°C | | | | | | | | | | | | | | | | | | | | | |
| Voltage Range 额定电压范围 | 16~80V | | | | | | | | | | | | | | | | | | | | | |
| Capacitance Range 额定容量范围 | 22~470 | | | | | | | | | | | | | | | | | | | | | |
| Capacitance Tolerance 额定容量容许误差值 | ±20% at 120Hz, 20°C | | | | | | | | | | | | | | | | | | | | | |
| Dissipation Factor (Tan δ) 损失角 | Standard Ratings 标准品一览表 I=0.01CV or 3(μA) whichever is greater (after 2 minutes) Where, C=rated capacitance in μF, V=rated DC working voltage in V I = 0.01CV或3(μA/微安)之中任一个较大值以下(2分钟后) I = 漏电流(μA/微安)、C = 额定静电容量(μF/微法拉)、V = 额定直流工作电压(V/伏特) | | | | | | | | | | | | | | | | | | | | | |
| Leakage Current 漏电流 | Impedance ratio shall not exceed the values given in the table below 阻抗比不可大于下表所列数值 <table border="1"> <thead> <tr> <th>Rated Voltage</th><th>16</th><th>25</th><th>35</th><th>50</th><th>63</th><th>80</th></tr> </thead> <tbody> <tr> <td>Impedance ratio</td><td>Z(-25°C)/Z(20°C)</td><td>1.5</td><td>1.5</td><td>1.5</td><td>1.5</td><td>1.5</td></tr> <tr> <td></td><td>Z(-55°C)/Z(20°C)</td><td>2.0</td><td>2.0</td><td>2.0</td><td>2.0</td><td>2.0</td></tr> </tbody> </table> | Rated Voltage | 16 | 25 | 35 | 50 | 63 | 80 | Impedance ratio | Z(-25°C)/Z(20°C) | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | | Z(-55°C)/Z(20°C) | 2.0 | 2.0 | 2.0 | 2.0 | 2.0 |
| Rated Voltage | 16 | 25 | 35 | 50 | 63 | 80 | | | | | | | | | | | | | | | | |
| Impedance ratio | Z(-25°C)/Z(20°C) | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | | | | | | | | | | | | | | | | |
| | Z(-55°C)/Z(20°C) | 2.0 | 2.0 | 2.0 | 2.0 | 2.0 | | | | | | | | | | | | | | | | |
| Stability at Low Temperature (at 120Hz) 低温特性 | After 10000Hrs. Application of the rated voltage at 105 °C ,returned to 20 °C for testing, they meet the characteristics listed below. 在105°C 下连续施加额定电压10000小时后, 返回20°C进行测试时, 满足以下项目 <table border="1"> <thead> <tr> <th>Capacitance Change 静电容量变化率</th><th>Within ±30% of initial value ≤初始值的±30%</th></tr> </thead> <tbody> <tr> <td>Tan δ 损失角</td><td>Less than 200% of specified value ≤初始值的200%</td></tr> <tr> <td>ESR 等效串联电阻</td><td>Less than 200% of specified value ≤初始值的200%</td></tr> <tr> <td>Leakage Current 漏电流</td><td>Within specified value ≤初始规格值</td></tr> </tbody> </table> | Capacitance Change 静电容量变化率 | Within ±30% of initial value ≤初始值的±30% | Tan δ 损失角 | Less than 200% of specified value ≤初始值的200% | ESR 等效串联电阻 | Less than 200% of specified value ≤初始值的200% | Leakage Current 漏电流 | Within specified value ≤初始规格值 | | | | | | | | | | | | | |
| Capacitance Change 静电容量变化率 | Within ±30% of initial value ≤初始值的±30% | | | | | | | | | | | | | | | | | | | | | |
| Tan δ 损失角 | Less than 200% of specified value ≤初始值的200% | | | | | | | | | | | | | | | | | | | | | |
| ESR 等效串联电阻 | Less than 200% of specified value ≤初始值的200% | | | | | | | | | | | | | | | | | | | | | |
| Leakage Current 漏电流 | Within specified value ≤初始规格值 | | | | | | | | | | | | | | | | | | | | | |
| Endurance 耐久性 | After storage for 1000Hrs at 105°C with no voltage applied and then being stabilized at 20°C, capacitors shall meet the limits specified in Endurance. (With voltage treatment) 于 105°C环境中不供给额定电压 1000 小时后, 待制品回复至 20°C的环境中进行量测时, 需满足耐久性试验要求(可进行电压补偿后再行量测). | | | | | | | | | | | | | | | | | | | | | |
| Shelf Life Test 高温储存特性 | After reflow soldering and restored at room temperature, they meet the characteristics listed below. 经过回流焊并冷却至室温后, 电容器的特性符合下表的要求. <table border="1"> <thead> <tr> <th>Capacitance Change 静电容量变化率</th><th>Within ±10% of initial value ≤初始值的±10%</th></tr> </thead> <tbody> <tr> <td>Tan δ 损失角</td><td>Less than 100% of specified value ≤初始值的100%</td></tr> <tr> <td>ESR 等效串联电阻</td><td>Less than 100% of specified value ≤初始值的100%</td></tr> <tr> <td>Leakage Current 漏电流</td><td>Within specified value ≤初始规格值</td></tr> </tbody> </table> | Capacitance Change 静电容量变化率 | Within ±10% of initial value ≤初始值的±10% | Tan δ 损失角 | Less than 100% of specified value ≤初始值的100% | ESR 等效串联电阻 | Less than 100% of specified value ≤初始值的100% | Leakage Current 漏电流 | Within specified value ≤初始规格值 | | | | | | | | | | | | | |
| Capacitance Change 静电容量变化率 | Within ±10% of initial value ≤初始值的±10% | | | | | | | | | | | | | | | | | | | | | |
| Tan δ 损失角 | Less than 100% of specified value ≤初始值的100% | | | | | | | | | | | | | | | | | | | | | |
| ESR 等效串联电阻 | Less than 100% of specified value ≤初始值的100% | | | | | | | | | | | | | | | | | | | | | |
| Leakage Current 漏电流 | Within specified value ≤初始规格值 | | | | | | | | | | | | | | | | | | | | | |
| Marking 标识 | Blue print on the case top. 铝壳顶部蓝色印刷 | | | | | | | | | | | | | | | | | | | | | |

■ DRAWING (Unit: mm) 外形图

□ DIMENSIONS (Unit:mm)尺寸表

单位: mm

| 尺寸 | 6.3X6 | 6.3X8 | 8X10 | 10X10 | 10X12 |
|----|-------|-------|------|-------|-------|
| ΦD | 6.3 | 6.3 | 8 | 10 | 10 |
| L | 6 | 8 | 10 | 10 | 12 |
| P | 2.5 | 2.5 | 3.5 | 5.0 | 5.0 |
| Φd | 0.45 | 0.45 | 0.60 | 0.60 | 0.60 |
| α | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 |
| β | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 |

