


LONG LIFE ASSURANCE

Upgrade
升级

宽温长寿命品


- Wide temperature range $-55\sim+105^{\circ}\text{C}$
适用于 $-55\sim+105^{\circ}\text{C}$ 的宽温范围
- Load life of 2000~3000 hours
负荷寿命2000~3000 小时
- Comply with the RoHS directive
符合 RoHS 指令



SPECIFICATIONS 特性表

Items 项目	Characteristics 主要特性																																																							
Operation Temperature Range 使用温度范围	$-55 \sim +105^{\circ}\text{C}$																																																							
Voltage Range 额定工作电压范围	6.3 ~ 100V																																																							
Capacitance Range 静电容量范围	0.1 ~ 3300 μF																																																							
Capacitance Tolerance 静电容量允许偏差	$\pm 20\%$ at 120Hz, 20°C																																																							
Leakage Current 漏电流	Leakage current ($\varnothing 4\text{--}\varnothing 10$) $\leq 0.01\text{CV}$ or $3 \mu\text{A}$, whichever is greater (after 2 minutes application of rated voltage) Leakage current ($\varnothing 12.5\text{--}\varnothing 16$) $\leq 0.03\text{CV}$ or $4 \mu\text{A}$, whichever is greater (after 1 minute application of rated voltage) 漏电流 ($\varnothing 4\text{--}\varnothing 10$) $\leq 0.01\text{CV}$ 或 $3\mu\text{A}$, 取较大值 (施加额定工作电压 2 分钟后) 漏电流 ($\varnothing 12.5\text{--}\varnothing 16$) $\leq 0.03\text{CV}$ 或 $4 \mu\text{A}$, 取较大值 (施加额定工作电压 1 分钟后)																																																							
Dissipation Factor (tan δ) 损耗角正切	Measurement frequency 测试频率: 120Hz, Temperature 温度: 20°C																																																							
	<table border="1"> <thead> <tr> <th>Rated Voltage (V) 额定工作电压</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>tan δ (max.)</td> <td>$\varnothing 4\text{--}\varnothing 10$</td> <td>0.30</td> <td>0.24</td> <td>0.20</td> <td>0.18</td> <td>0.16</td> <td>0.14</td> </tr> <tr> <td>最大损耗角正切</td> <td>$\varnothing 12.5\text{--}\varnothing 16$</td> <td>0.38</td> <td>0.34</td> <td>0.30</td> <td>0.28</td> <td>0.22</td> <td>0.18</td> </tr> </tbody> </table>	Rated Voltage (V) 额定工作电压	6.3	10	16	25	35	50	tan δ (max.)	$\varnothing 4\text{--}\varnothing 10$	0.30	0.24	0.20	0.18	0.16	0.14	最大损耗角正切	$\varnothing 12.5\text{--}\varnothing 16$	0.38	0.34	0.30	0.28	0.22	0.18																																
Rated Voltage (V) 额定工作电压	6.3	10	16	25	35	50																																																		
tan δ (max.)	$\varnothing 4\text{--}\varnothing 10$	0.30	0.24	0.20	0.18	0.16	0.14																																																	
最大损耗角正切	$\varnothing 12.5\text{--}\varnothing 16$	0.38	0.34	0.30	0.28	0.22	0.18																																																	
Stability at Low Temperature 低温特性	Measurement frequency 测试频率: 120Hz																																																							
	Rated Voltage (V 额定工作电压)	6.3	10	16	25	35	50																																																	
	<table border="1"> <thead> <tr> <th rowspan="2">Impedance Ratio 阻抗比</th> <th rowspan="2">$\varnothing 4\text{--}\varnothing 10$</th> <th colspan="6">Z($-25^{\circ}\text{C}$)/Z($20^{\circ}\text{C}$)</th> </tr> </thead> <tbody> <tr> <td>3</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <th rowspan="2">ZT/Z20 (max.)</th> <th rowspan="2">$\varnothing 12.5\text{--}\varnothing 16$</th> <th colspan="6">Z($-55^{\circ}\text{C}$)/Z($20^{\circ}\text{C}$)</th> </tr> <tr> <td>8</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> </tr> <tr> <th rowspan="2"></th> <th rowspan="2">$\varnothing 12.5\text{--}\varnothing 16$</th> <th colspan="6">Z($-25^{\circ}\text{C}$)/Z($20^{\circ}\text{C}$)</th> </tr> <tr> <td>5</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <th rowspan="2"></th> <th rowspan="2">$\varnothing 12.5\text{--}\varnothing 16$</th> <th colspan="6">Z($-55^{\circ}\text{C}$)/Z($20^{\circ}\text{C}$)</th> </tr> <tr> <td>12</td> <td>10</td> <td>8</td> <td>5</td> <td>4</td> <td>3</td> </tr> </tbody> </table>	Impedance Ratio 阻抗比	$\varnothing 4\text{--}\varnothing 10$	Z(-25°C)/Z(20°C)						3	3	2	2	2	2	ZT/Z20 (max.)	$\varnothing 12.5\text{--}\varnothing 16$	Z(-55°C)/Z(20°C)						8	5	4	3	3	3		$\varnothing 12.5\text{--}\varnothing 16$	Z(-25°C)/Z(20°C)						5	4	3	2	2	2		$\varnothing 12.5\text{--}\varnothing 16$	Z(-55°C)/Z(20°C)						12	10	8	5	4
Impedance Ratio 阻抗比	$\varnothing 4\text{--}\varnothing 10$			Z(-25°C)/Z(20°C)																																																				
		3	3	2	2	2	2																																																	
ZT/Z20 (max.)	$\varnothing 12.5\text{--}\varnothing 16$	Z(-55°C)/Z(20°C)																																																						
		8	5	4	3	3	3																																																	
	$\varnothing 12.5\text{--}\varnothing 16$	Z(-25°C)/Z(20°C)																																																						
		5	4	3	2	2	2																																																	
	$\varnothing 12.5\text{--}\varnothing 16$	Z(-55°C)/Z(20°C)																																																						
		12	10	8	5	4	3																																																	
Load Life 高温负荷特性	After 3000 hrs. (2000 hrs. for $\varnothing 4\text{--}\varnothing 6.3 \times 5.8$) application of the rated voltage at 105°C , they meet the characteristics listed below. 在 105°C 环境中施加额定工作电压3000小时 ($\varnothing 4\text{--}\varnothing 6.3 \times 5.8$ 为 2000 小时) 后, 电容器的特性符合下表的要求。																																																							
	<table border="1"> <tbody> <tr> <td>Capacitance Change 静电容量变化率</td> <td>Within $\pm 30\%$ of initial value 初始值的$\pm 30\%$以内</td> </tr> <tr> <td>Dissipation Factor 损耗角正切</td> <td>300% or less of initial specified value 不大于规范值的300%</td> </tr> <tr> <td>Leakage Current 漏电流</td> <td>initial specified value or less 不大于规范值</td> </tr> </tbody> </table>	Capacitance Change 静电容量变化率	Within $\pm 30\%$ of initial value 初始值的 $\pm 30\%$ 以内	Dissipation Factor 损耗角正切	300% or less of initial specified value 不大于规范值的300%	Leakage Current 漏电流	initial specified value or less 不大于规范值																																																	
Capacitance Change 静电容量变化率	Within $\pm 30\%$ of initial value 初始值的 $\pm 30\%$ 以内																																																							
Dissipation Factor 损耗角正切	300% or less of initial specified value 不大于规范值的300%																																																							
Leakage Current 漏电流	initial specified value or less 不大于规范值																																																							
Shelf Life 高温贮存特性	After leaving capacitors under no load at 105°C for 1000 hours, they meet the specified value for load life characteristics listed above. 在 105°C 环境中无负荷放置1000 小时后, 电容器的特性符合高温负荷特性中所列的规定值。																																																							
Resistance to Soldering Heat 耐焊接热特性	After reflow soldering and restored at room temperature, they meet the characteristics listed below. 经过回流焊并冷却至室温后, 电容器的特性符合下表的要求。																																																							
	<table border="1"> <tbody> <tr> <td>Capacitance Change 静电容量变化率</td> <td>Within $\pm 10\%$ of initial value 初始值的$\pm 10\%$以内</td> </tr> <tr> <td>Dissipation Factor 损耗角正切</td> <td>initial specified value or less 不大于规范值</td> </tr> <tr> <td>Leakage Current 漏电流</td> <td>initial specified value or less 不大于规范值</td> </tr> </tbody> </table>	Capacitance Change 静电容量变化率	Within $\pm 10\%$ of initial value 初始值的 $\pm 10\%$ 以内	Dissipation Factor 损耗角正切	initial specified value or less 不大于规范值	Leakage Current 漏电流	initial specified value or less 不大于规范值																																																	
	Capacitance Change 静电容量变化率	Within $\pm 10\%$ of initial value 初始值的 $\pm 10\%$ 以内																																																						
	Dissipation Factor 损耗角正切	initial specified value or less 不大于规范值																																																						
Leakage Current 漏电流	initial specified value or less 不大于规范值																																																							
Marking 标识	Black print on the case top. 铝壳顶部黑字印刷。																																																							

DRAWING (Unit: mm) 外形图

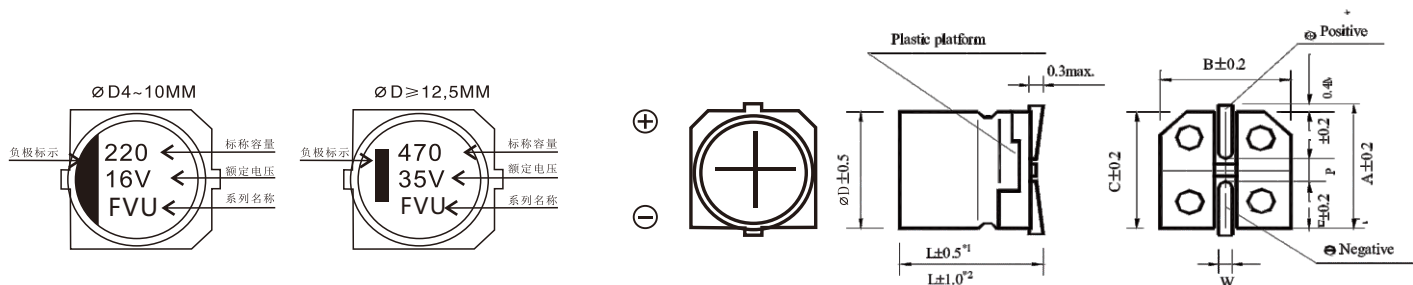

*1. Applicable to $\varnothing 4\text{--}\varnothing 10 \times 13.5$ 适用于 $\varnothing 4\text{--}\varnothing 10 \times 13.5$

*2. Applicable to $\varnothing 12.5\text{--}\varnothing 16$ 适用于 $\varnothing 12.5\text{--}\varnothing 16$

* A pressure relief vent is attached to products over $\varnothing D = 8 \times 10.5$

* $\varnothing D = 8 \times 10.5$ 以上产品有缓压防爆阀

Note: All design and specifications are for reference only and is subject to change without prior notice. If any doubt about safety for your application, please contact us immediately for technical assistance before purchase.

注: 以上所提供的设计及特性参数仅供参考, 任何修改不作预先通知。如果在使用上有疑问, 请在采购前与我们联系, 以便提供技术上的协助

□ DIMENSIONS (Unit: mm) 尺寸表

D x L	4 x 5.8	5 x 5.8	6.3 x 5.8	6.3 x 7.7	8 x 10.5	10 x 10.5	10 x 13.5	12.5 x 13.5	12.5 x 16	16 x 16.5
A	5.1	6.1	7.3	7.3	9.2	11.2	11.2	13.8	13.8	18.0
B	4.3	5.3	6.6	6.6	8.4	10.4	10.4	13.0	13.0	17.0
C	4.3	5.3	6.6	6.6	8.4	10.4	10.4	13.0	13.0	17.0
P ±0.2	1.0	1.3	2.2	2.2	3.1	4.4	4.4	4.4	4.4	6.7
L	5.8	5.8	5.8	7.7	10.5	10.5	13.5	13.5	16.0	16.5

□ DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT 规格尺寸及最大允许纹波电流

μF	WV Code 代码	6.3		10		16		25		35		50	
		0J		1A		1C		1E		1V		1H	
0.1	0R1											4 x 5.8	1
0.22	R22											4 x 5.8	2
0.33	R33											4 x 5.8	3
0.47	R47											4 x 5.8	5
1	010											4 x 5.8	10
2.2	2R2											4 x 5.8	16
3.3	3R3											4 x 5.8	16
4.7	4R7							4 x 5.8	13	4 x 5.8	14	5 x 5.8	23
10	100					4 x 5.8	18	5 x 5.8	20	5 x 5.8	21	6.3 x 5.8	35
22	220	4 x 5.8	22	5 x 5.8	25	5 x 5.8	27	6.3 x 5.8	36	6.3 x 5.8	38	6.3 x 7.7	70
33	330	5 x 5.8	27	5 x 5.8	30	6.3 x 5.8	40	6.3 x 5.8	60	6.3 x 7.7	84	8 x 10.5	90
47	470	5 x 5.8	33	6.3 x 5.8	41	6.3 x 5.8	48	6.3 x 7.7	90	8 x 10.5	98	8 x 10.5	90
100	101	6.3 x 5.8	50	6.3 x 5.8	53	6.3 x 5.8	60	8 x 10.5	130	8 x 10.5	130	10 x 10.5	100
150	151	6.3 x 5.8	55	6.3 x 7.7	105	6.3 x 7.7	95	8 x 10.5	140	10 x 10.5	315	10 x 10.5	100
220	221	6.3 x 7.7	100	8 x 10.5	210	8 x 10.5	210	10 x 10.5	190	10 x 10.5	315	10 x 13.5 (10 x 10.5)	250 (100)
330	331	8 x 10.5	210	8 x 10.5	210	8 x 10.5	210	10 x 10.5	315	10 x 10.5	315	12.5 x 13.5	400
470	471	8 x 10.5	210	10 x 10.5	315	10 x 10.5	315	10 x 10.5	315	12.5 x 13.5 (10 x 13.5)	500 (360)	16 x 16.5 (12.5 x 16)	650 (500)
680	681	8 x 10.5	210	10 x 10.5	315	10 x 10.5	315	10 x 13.5	380	12.5 x 13.5	500		
1000	102	10 x 10.5	315	10 x 13.5 (10 x 10.5)	360 (315)	12.5 x 13.5 (10 x 13.5) (10 x 10.5)	450 (350) (315)	12.5 x 13.5	550	16 x 16.5 (12.5 x 16)	700 (550)		
1500	152	10 x 13.5 (10 x 10.5)	450 (315)	12.5 x 13.5	500	12.5 x 13.5	500	12.5 x 16	800				
2200	222	12.5 x 13.5	620	12.5 x 16 (12.5 x 13.5)	650 (600)	16 x 16.5	900	16 x 16.5	1000			Case size 尺寸	Ripple current 纹波电流
3300	332	12.5 x 16	750	16 x 16.5	950								

μF	WV Code 代码	63		80		100	
		1J		1K		2A	
4.7	4R7	5 x 5.8	30				
10	100	6.3 x 5.8	50	6.3 x 7.7	60		
22	220	6.3 x 7.7	84	8 x 10.5	130	8 x 10.5	130
33	330	8 x 10.5	130	8 x 10.5	130	10 x 10.5	200
47	470	8 x 10.5	130	10 x 10.5	190	12.5 x 13.5	240
100	101	10 x 10.5	190	12.5 x 13.5	220	12.5 x 13.5	280
150	151	12.5 x 13.5	240	12.5 x 16	290	12.5 x 16.5	340
220	221	12.5 x 16	320	16 x 16.5	410	16 x 16.5	340
330	331	16 x 16.5	450	16 x 16.5	510	Case size 尺寸	Ripple current 纹波电流
470	471	16 x 16.5	540				

• Case size ∅D x L (mm), ripple current (mA rms) at 105°C, 120Hz
 • 尺寸 ∅D x L (mm), 纹波电流 (mA rms) 于 105°C, 120Hz

Note: All design and specifications are for reference only and is subject to change without prior notice. If any doubt about safety for your application, please contact us immediately for technical assistance before purchase.

注：以上所提供的设计及特性参数谨供参考，任何修改不作预先通知。如果在使用上有疑问，请在采购前与我们联系，以便提供技术上的协助

□ FREQUENCY COEFFICIENT OF ALLOWABLE RIPPLE CURRENT 纹波电流频率补偿系数

Frequency 频率		50Hz	120Hz	300Hz	1KHz	10KHz~	
Coefficient 系数	Ø4 ~ Ø10	0.1 ~ 100µF	0.70	1.00	1.17	1.36	1.50
		150 ~ 1500µF	0.85	1.00	1.08	1.20	1.30
	Ø12.5 ~ Ø16	~ 470µF	0.75	1.00	1.35	1.57	2.00
		680 ~ 3300µF	0.85	1.00	1.23	1.34	1.50

- The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.
- 铝电解电容器由于在纹波电流叠加时自我发热，温度上升而老化，每升温5°C寿命减少一半；要想保持长寿命请在使用过程中降低纹波电流。

- Taping specifications are given in page 20 "Taping Specifications". 编带标准请参阅第 20 页“编带标准”。
- Please refer to page 21 "Package Quantity" for the minimum package quantity. 最小包装数量请参阅第 21 页“包装数量”。

Note: All design and specifications are for reference only and is subject to change without prior notice. If any doubt about safety for your application, please contact us immediately for technical assistance before purchase.

注：以上所提供的设计及特性参数谨供参考，任何修改不作预先通知。如果在使用上有疑问，请在采购前与我们联系，以便提供技术上的协助